

Altus 28 WireFree Li-ion RTS

PRODUCT SPECIFICATIONS



Designed for convenience and simplicity

New motor in the WireFree range, for residential small to medium blinds.

Lithium-ion +

Embedded battery motor:

- All-in-one
- Aesthetic
- Compact and light
- Battery power indicator
- Easy recharging



Built-in battery motor

Powered by a compact and light lithium-ion battery.



"my" favourite

In one click move the blind to your favourite position.



WireFree

For quicker installation.



Compatible with Mod/Var functions



Soft start and soft stop



Adjustable speed

From 10 to 28 rpm.




Information feedback

Low battery indicator on the controller interface and easy re-setting.



Thin head

White and thin round head for discreet blending.



Slats tilting



Altus 28 WireFree Li-ion RTS

PRODUCT SPECIFICATIONS



BENEFITS FOR PROFESSIONALS

Easy integration

- Attached external antenna
- Sleep mode to prevent motor from unwanted pairing

Simple installation

- Programming button and LED on motor head interface
- Program end limits via transmitter
- No need to have electrical knowledge
- WireFree motor for quick installation

BENEFITS FOR END USERS

Daily convenience and control

- Smooth motion with adjustable speed
- Move your blinds effortlessly and remotely thanks to radio control
- Move your blind in one click to your favourite 'my' position

Easy use and maintenance

- Rechargeable battery
- Low battery LED indicator

COMPATIBLE END PRODUCTS For interior applications only.



Roller Blinds




Roman Blinds*



Pleated and cellular*



Zebra



Sheer



Venetian*

* Using CTS40

TECHNICAL DATA


Voltage Supply	12V DC
Index Protecting Rating	IP 20 (for indoor use only)
Limit Switch Type	Electronic
Temperature Working Range	0°C to 50°C
Temperature Storage Range	-10°C to 60°C
Insulation Class	Class III
Antenna	16.5 cm wire length must not be cut or lengthened. For greatest RF range, it must not be exposed and should not come in contact with metal surfaces. RF wire may need to be repositioned for optimal performance.

PERFORMANCES

Nominal Torque	1.5 Nm
Nominal Speed	20 rpm
Adjustable Speed	10 – 28 (by 2 rpm increments)
Radio Protocol	RTS
Radio Frequency	433.42 MHz
Battery Lifetime	9 months (with single up and down cycle per day)
Power Supply	Li-ion embedded battery
Low Battery Indicator	LED
Capacity of Memory	12 Transmitters and 3 Sun Sensors
Item Number	1003313

DIMENSIONS

L (mm): 580 mm + Plug end
Tube min Ø (int): 28.8 mm

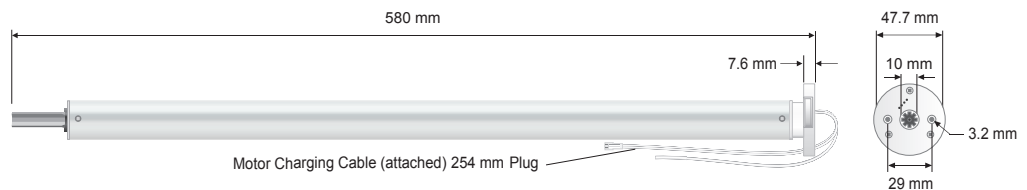

WIREFREE PARTS AND ACCESSORIES

Li-ion charger has to be ordered separately		Accessories available (same accessories as Sonesse 30 WireFree Li-ion RTS):	
9020673	Li-ion charger extension cable 96/2.4 m	9021018	Sonesse 30 WF Acmeda Sys45 Crown and drive
9020811	Li-ion charger 30 series AUS	9021036	Sonesse 30 WF Acmeda Sys45 Heavy Crown and drive
		9021037	Sonesse 30 WF HD Quantum Crown and drive
		9020699	Sonesse 30 WF HD 37 mm Crown and drive
		9020674	Sonesse 30 WF Rollease 1.5/32 mm Crown and drive
		9020675	Sonesse 30 WF Louvolite 40 mm Crown and drive
		9020676	Sonesse 30 WF to 400s adapter kit (required for CTS40)

SOMFY Pty Limited – ABN 77 003 917 244 – 20/38-46 South St, Rydalmere NSW 2116 – T +61 (0)2 8845 7200 – somfy.au@somfy.com